



SSID Wireless Setting

1. เปิด Browser (Chrome, Firefox, IE) พิมพ์ **192.168.1.1** ในช่อง Address แล้วกด **Enter**
2. ใส่ Username และ Password โดยดูจากข้อมูลด้านล่างของเราเตอร์

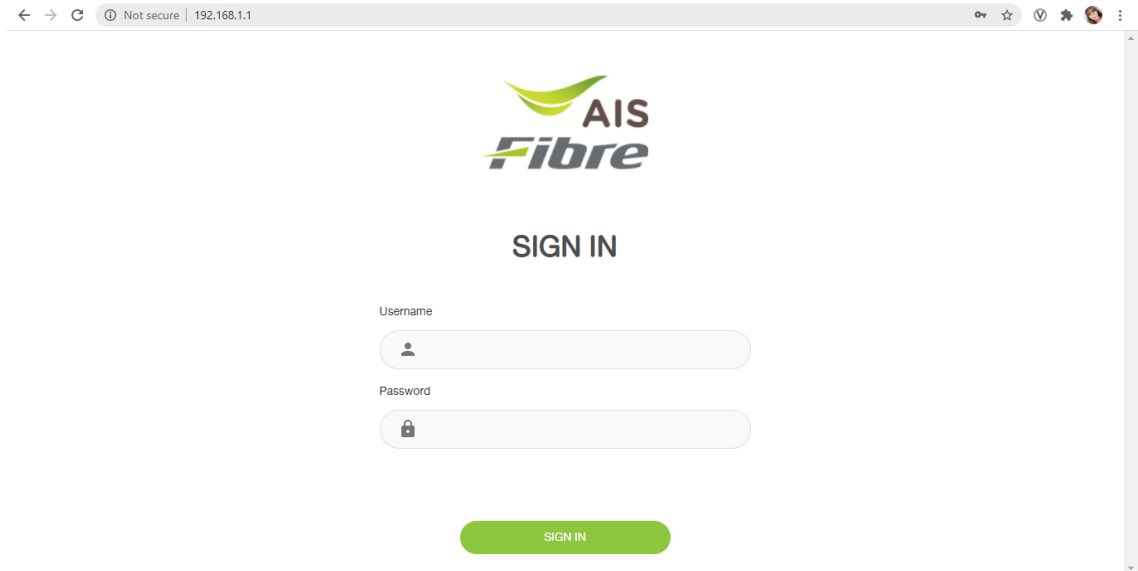


3. หน้า Home คลิก **Local Network**

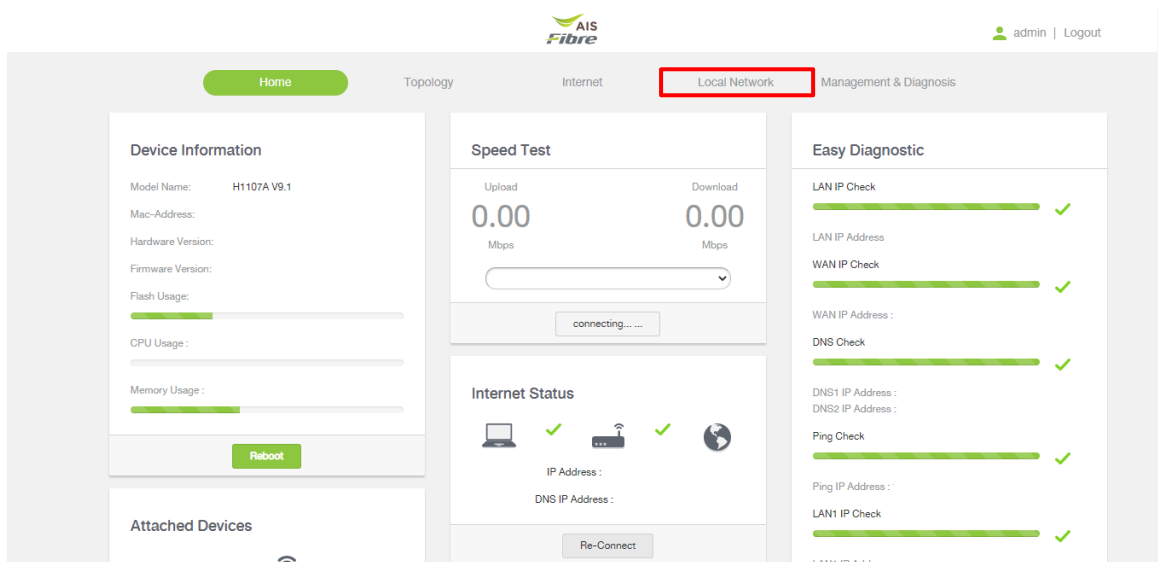

The screenshot displays the AIS Fibre router management dashboard. The 'Local Network' tab is highlighted with a red box. The dashboard includes several sections:


- Device Information:** Model Name: H1107A V9.1, Mac-Address, Hardware Version, Firmware Version, Flash Usage, CPU Usage, and Memory Usage. A 'Reboot' button is visible.
- Speed Test:** Upload and Download speeds are both 0.00 Mbps. A 'connecting...' button is present.
- Internet Status:** Shows IP Address and DNS IP Address with status icons. A 'Re-Connect' button is visible.
- Easy Diagnostic:** A list of diagnostic checks with green checkmarks indicating success: LAN IP Check, LAN IP Address, WAN IP Check, WAN IP Address, DNS Check, DNS1 IP Address, DNS2 IP Address, Ping Check, Ping IP Address, LAN1 IP Check, and LAN1 IP Address.

4. คลิกเลือก WLAN -> WLAN Basic -> WLAN SSID Configuration

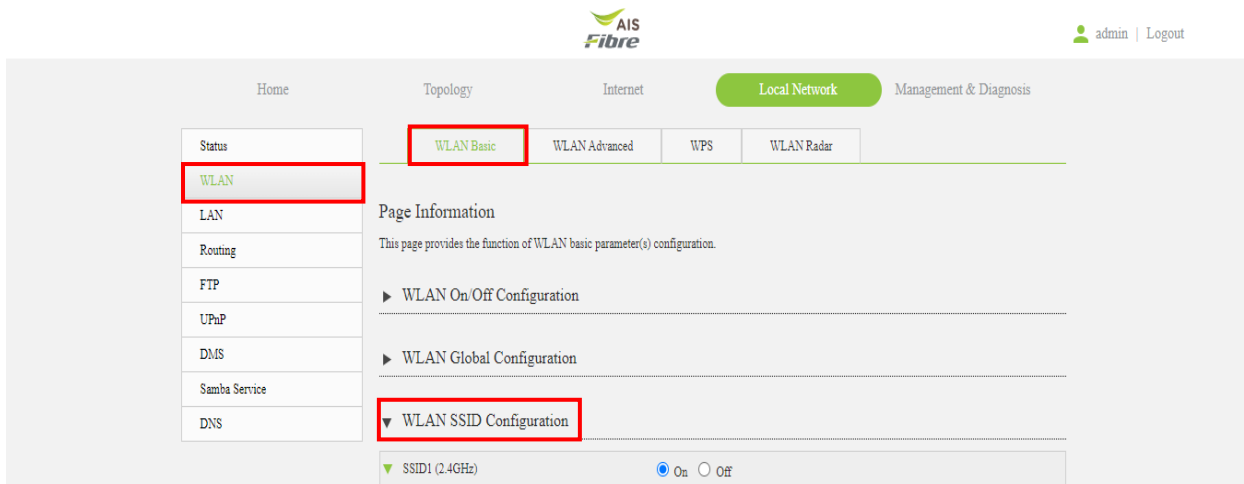

The screenshot shows the AIS Fibre web interface. At the top, there are navigation tabs: Home, Topology, Internet, Local Network (selected), and Management & Diagnosis. Below these are sub-tabs for WLAN configuration: WLAN Basic (selected), WLAN Advanced, WPS, and WLAN Radar. On the left, a sidebar menu lists various network settings, with 'WLAN' highlighted. The main content area shows 'Page Information' and a list of configuration options: 'WLAN On/Off Configuration', 'WLAN Global Configuration', and 'WLAN SSID Configuration' (selected). Below this, the 'SSID1 (2.4GHz)' section is visible, with 'On' selected.

5. ทำการตั้งค่า SSID Name และ Password ทั้ง 2.4GHz และ 5GHz

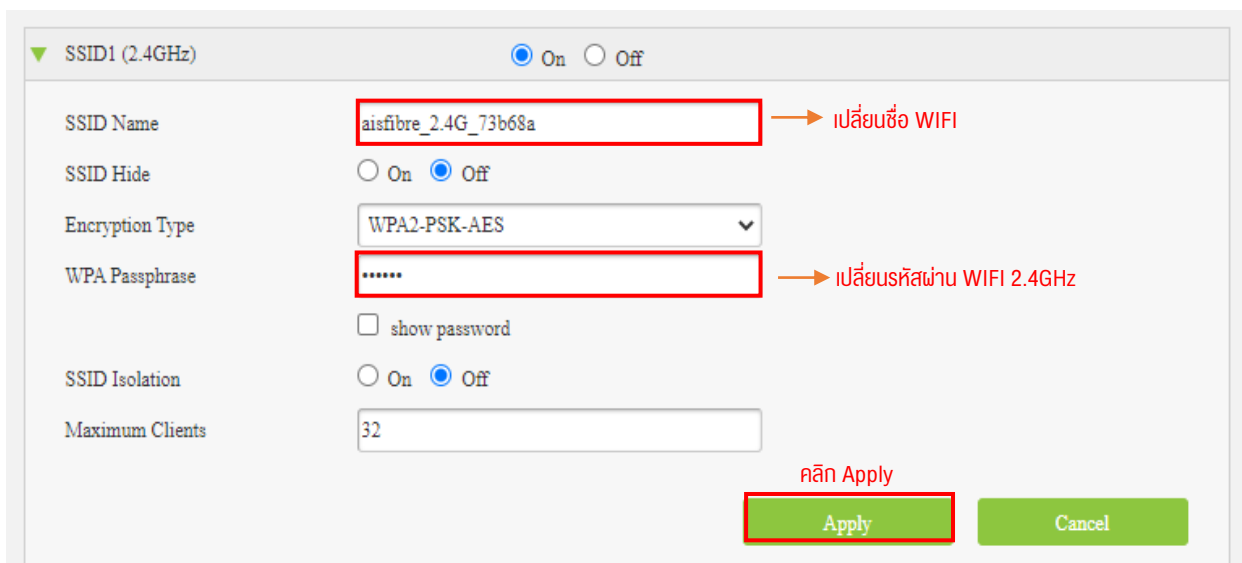

The screenshot shows the 'SSID1 (2.4GHz)' configuration page. The 'On' radio button is selected. The 'SSID Name' field contains 'aisfibre_2.4G_73b68a' and is annotated with a red box and an arrow pointing to the text 'เปลี่ยนชื่อ WIFI'. The 'WPA Passphrase' field contains six dots and is annotated with a red box and an arrow pointing to the text 'เปลี่ยนรหัสผ่าน WIFI 2.4GHz'. Other fields include 'SSID Hide' (Off), 'Encryption Type' (WPA2-PSK-AES), 'show password' (unchecked), 'SSID Isolation' (Off), and 'Maximum Clients' (32). At the bottom right, there are 'Apply' and 'Cancel' buttons, with the 'Apply' button highlighted by a red box and the text 'คลิก Apply' above it.

▼ SSID5 (5GHz) On Off

SSID Name → เปลี่ยนชื่อ WIFI

SSID Hide On Off

Encryption Type

WPA Passphrase → เปลี่ยนรหัสผ่าน WIFI 2.4GHz

show password

SSID Isolation On Off

Maximum Clients

คลิก Apply