



การตั้งค่า Dynamic Domain Name Server (DDNS)

1. เปิด Browser (Chrome, Firefox, IE) พิมพ์ **192.168.1.1** ในช่อง Address แล้วกด **Enter**
2. ใส่ Username: **admin** Password: **aisadmin** และใส่ CAPTCHA แล้วกด **SIGN IN**

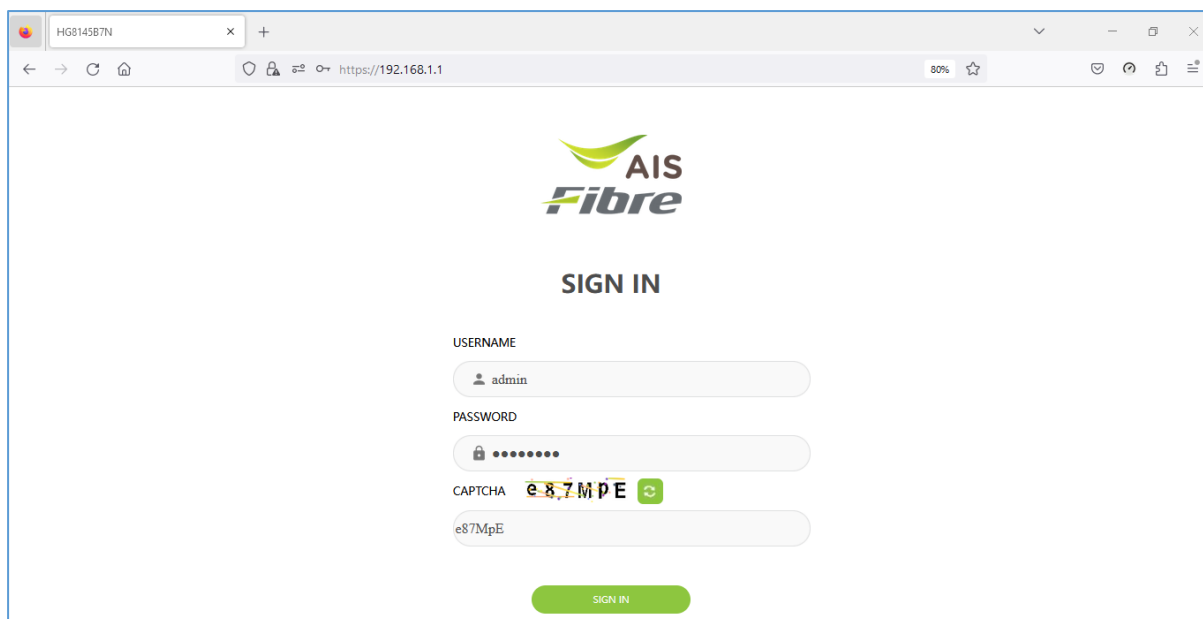


รูปที่ 1 หน้า Login

3. หน้า Home คลัง Application

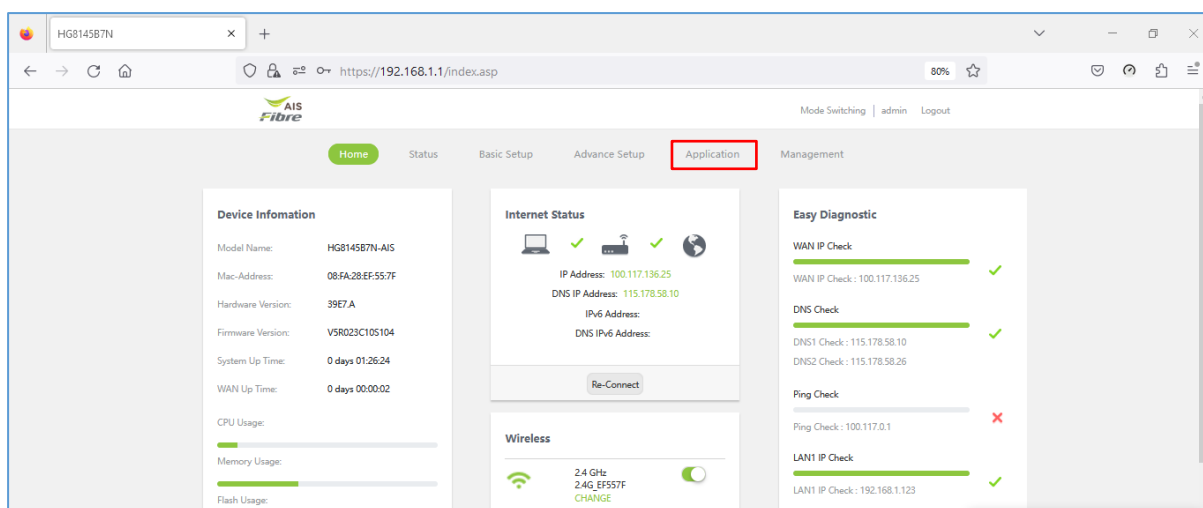

รูปที่ 2 หน้า Home

4. เลือกเมนูด้านซ้าย DDNS Function -> กด New เพื่อสร้าง DDNS

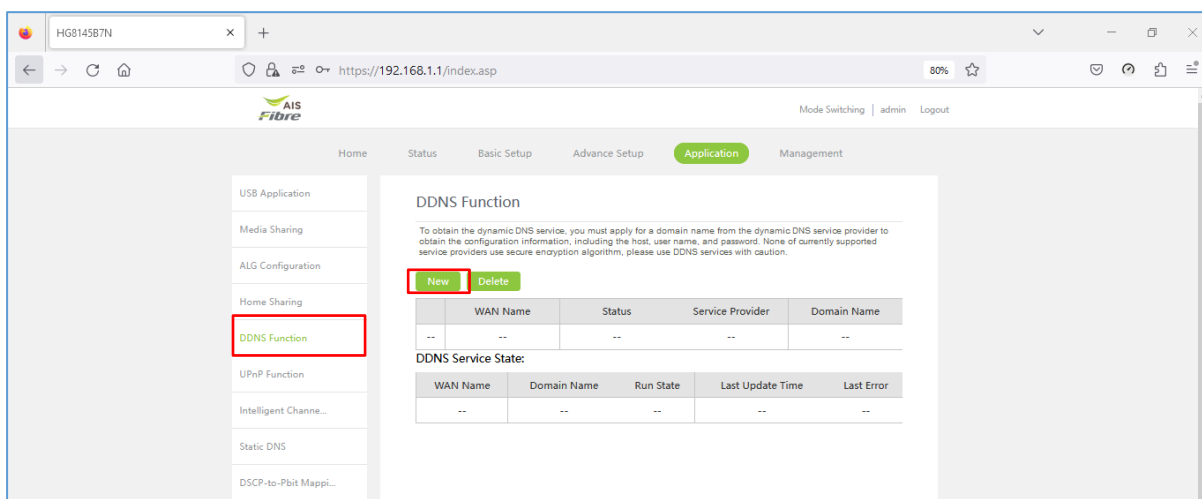

รูปที่ 3 หน้า DDNS Function

5. เลือก **Enable DDNS** เพื่อเปิดใช้งาน
6. กรอกข้อมูลต่างๆให้ครบถ้วน
 - **WAN Name:** เลือก WAN Name ที่ต้องการ
 - **Domain Name:** Host Name ที่สร้างไว้บนเว็บของผู้ให้บริการ DDNS
 - **Service Provider:** เลือกผู้ให้บริการ DDNS ที่สมัครไว้
 - **Username:** Username บนเว็บของผู้ให้บริการ DDNS
 - **Password:** Password บนเว็บของผู้ให้บริการ DDNS
7. กด **Apply** เพื่อบันทึกการท างาน

DDNS Function

To obtain the dynamic DNS service, you must apply for a domain name from the dynamic DNS service provider to obtain the configuration information, including the host, user name, and password. None of currently supported service providers use secure encryption algorithm, please use DDNS services with caution.

New Delete

WAN Name	Status	Service Provider	Domain Name
----	----	----	-----

DDNS Service Information:

Enable DDNS:

WAN Name:

Domain Name: *(1-255 characters)

Service provider information:

Service Provider:

Host of the Service Provider: *(1-255 characters)

Service Port: *(1-65535)

User Name: *(1-256 characters)

Password: (0-256 characters)

Encryption Mode:

Apply Cancel

รูปที่ 4 หน้า DDNS Service