


## วิธีเปลี่ยนชื่อและรหัส WiFi


1. เปิดเบราว์เซอร์ไปที่หน้าเราเตอร์ IP 192.168.1.1




2. กรอก Username และ Password โดยดูจากข้อมูลด้านล่างของเราเตอร์ จากนั้นคลิก Sign In

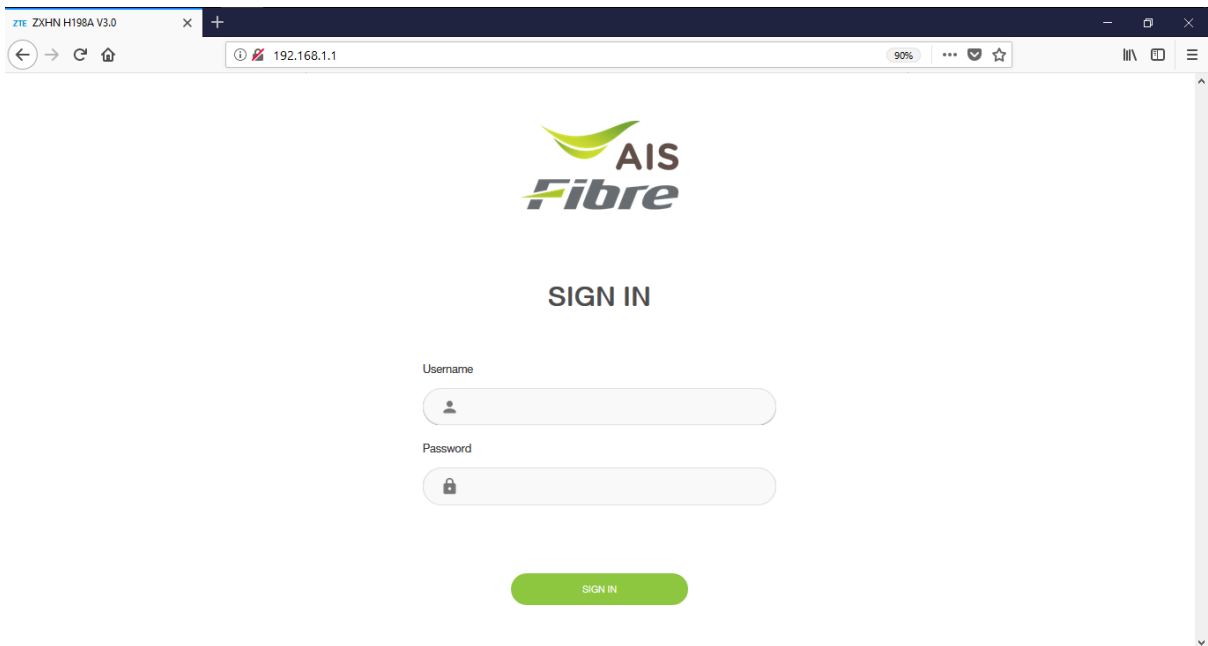

3. หน้าการตั้งค่า

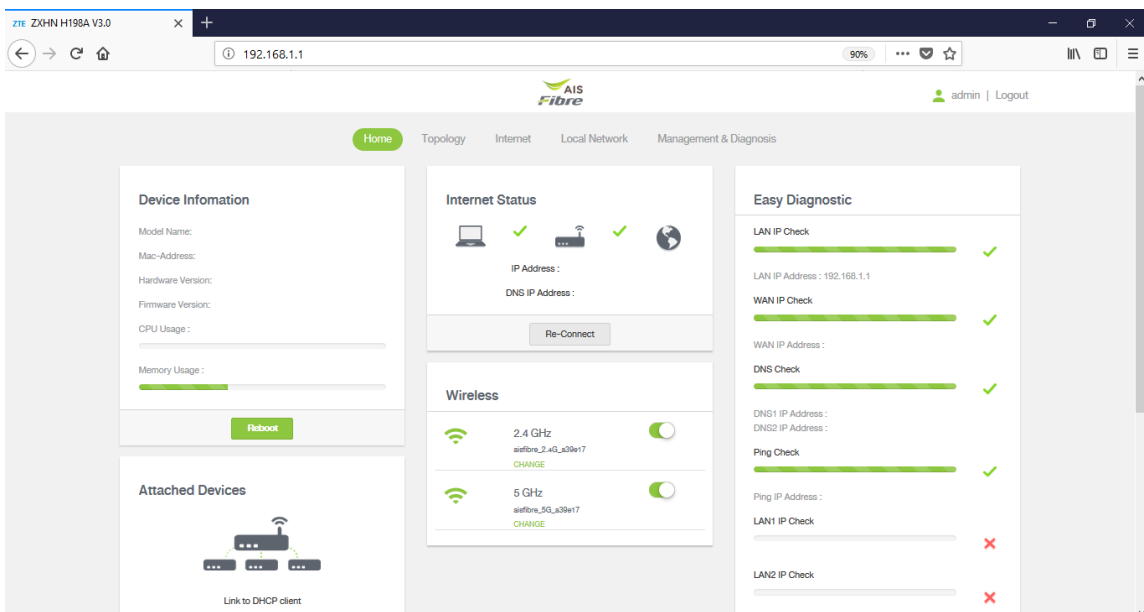


4. คลิกเลือก Local Network -> WLAN -> WLAN Basic -> WLAN SSID Configuration

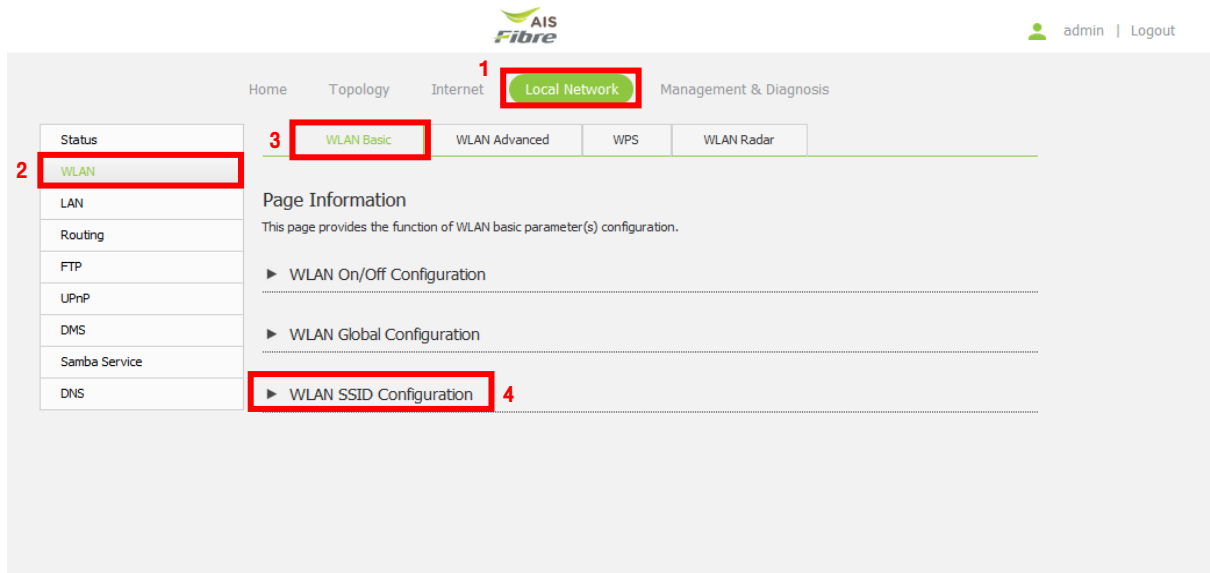

The screenshot shows the AIS Fibre web interface. At the top, there are navigation tabs: Home, Topology, Internet, **Local Network** (highlighted with a red box and '1'), and Management & Diagnosis. Below the tabs, there are sub-tabs: **WLAN Basic** (highlighted with a red box and '3'), WLAN Advanced, WPS, and WLAN Radar. On the left sidebar, there is a menu with items: Status, **WLAN** (highlighted with a red box and '2'), LAN, Routing, FTP, UPnP, DMS, Samba Service, and DNS. In the main content area, under 'Page Information', there are three expandable sections: WLAN On/Off Configuration, WLAN Global Configuration, and **WLAN SSID Configuration** (highlighted with a red box and '4').

5. ทำการตั้ง SSID Name (ชื่อ WiFi) และ Password ทั้ง 2.4 GHz และ 5GHz

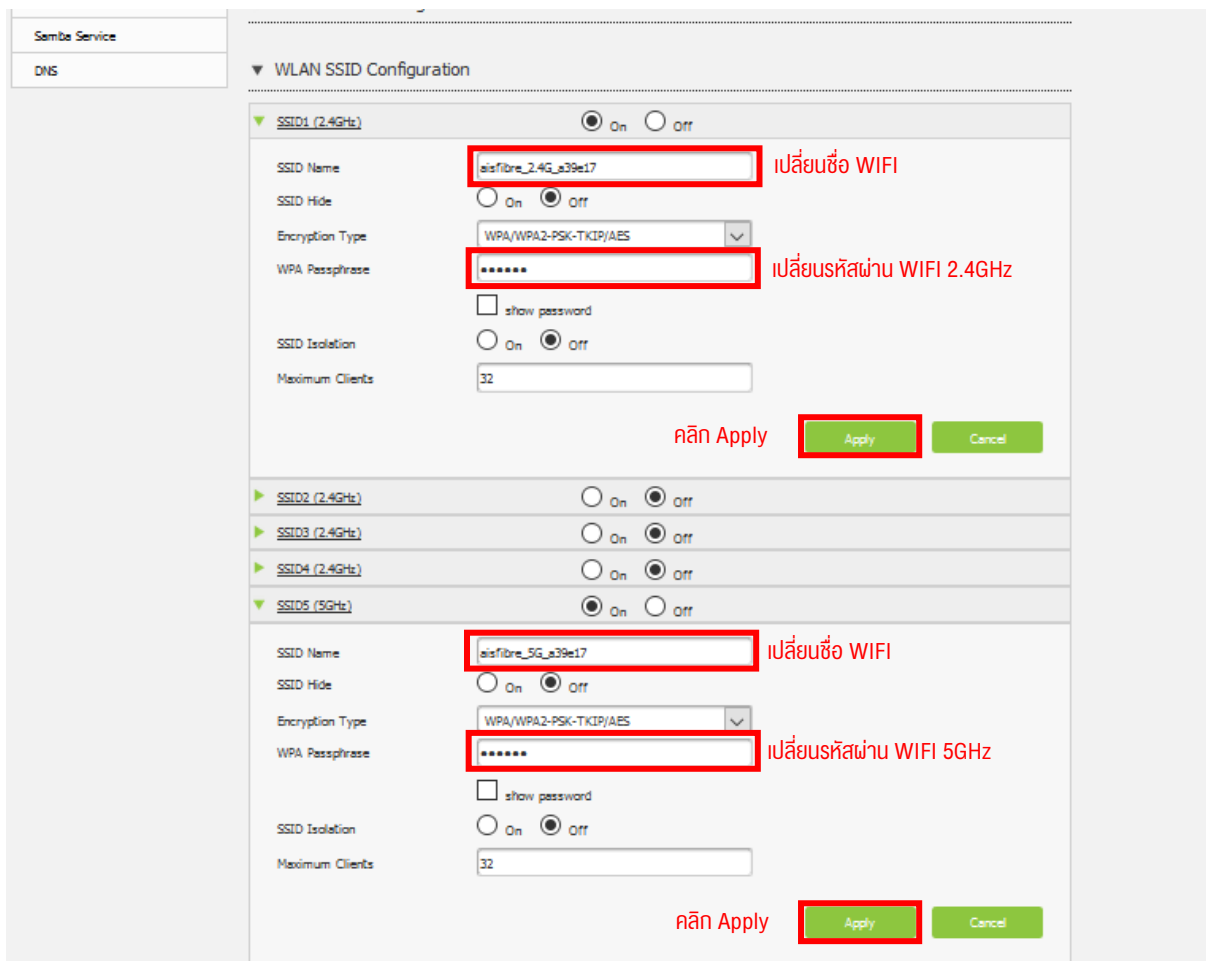

The screenshot shows the 'WLAN SSID Configuration' page. It has two main sections for 2.4GHz and 5GHz SSIDs. Each section has a 'WLAN SSID Configuration' header and a 'SSID (2.4GHz)' or 'SSID (5GHz)' sub-section with 'On' and 'Off' radio buttons. The 2.4GHz section is currently active. In the 2.4GHz section, the 'SSID Name' field contains 'aisfibre\_2.4G\_s39e17' (highlighted with a red box and the annotation 'เปลี่ยนชื่อ WIFI') and the 'WPA Passphrase' field contains '\*\*\*\*\*' (highlighted with a red box and the annotation 'เปลี่ยนรหัสผ่าน WIFI 2.4GHz'). Below these fields are 'show password' and 'SSID Isolation' options. At the bottom of the section are 'Apply' and 'Cancel' buttons, with the 'Apply' button highlighted by a red box and the annotation 'คลิก Apply'. The 5GHz section is currently inactive. In the 5GHz section, the 'SSID Name' field contains 'aisfibre\_5G\_s39e17' (highlighted with a red box and the annotation 'เปลี่ยนชื่อ WIFI') and the 'WPA Passphrase' field contains '\*\*\*\*\*' (highlighted with a red box and the annotation 'เปลี่ยนรหัสผ่าน WIFI 5GHz'). Below these fields are 'show password' and 'SSID Isolation' options. At the bottom of the section are 'Apply' and 'Cancel' buttons, with the 'Apply' button highlighted by a red box and the annotation 'คลิก Apply'.